

Fig. 1

FIG. 2 is a block diagram of a system 10 for processing signals from a sensor 12. The system 10 includes an amplifier 14, a conditioning circuit 16, an A/D converter 18, a microprocessor 20, a memory 22, and an I/O interface 24. The sensor 12 is connected to the amplifier 14. The amplifier 14 is connected to the conditioning circuit 16. The conditioning circuit 16 is connected to the A/D converter 18. The A/D converter 18 is connected to the microprocessor 20. The microprocessor 20 is connected to the memory 22. The memory 22 is connected to the I/O interface 24. The I/O interface 24 is connected to the microprocessor 20.

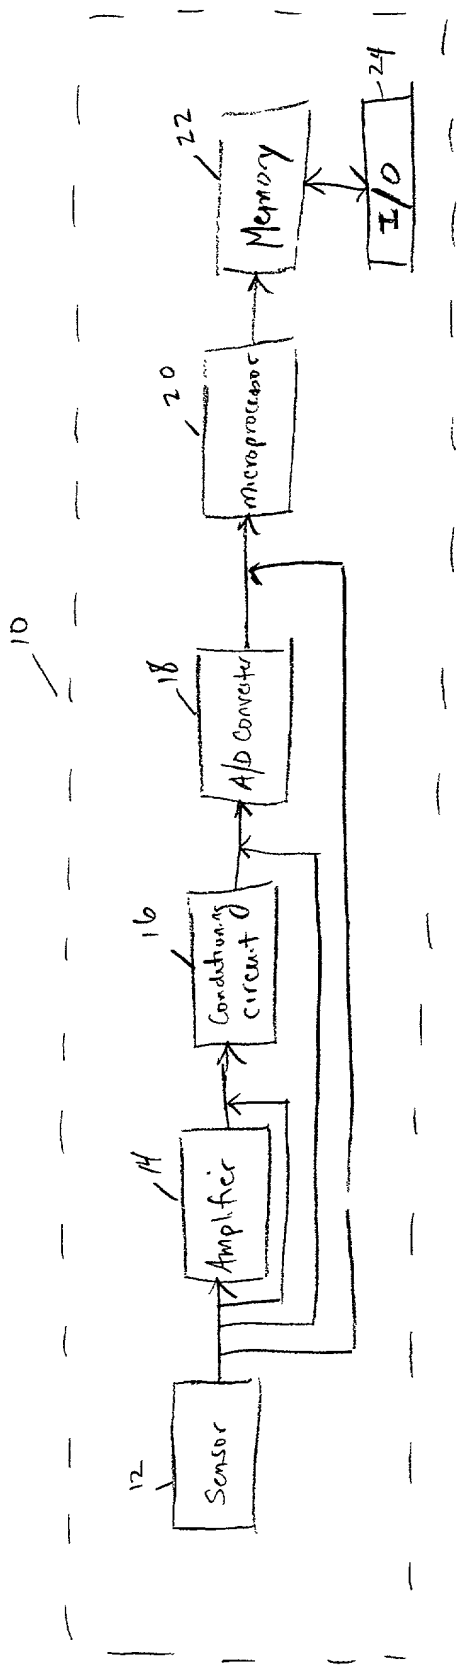


Fig 2

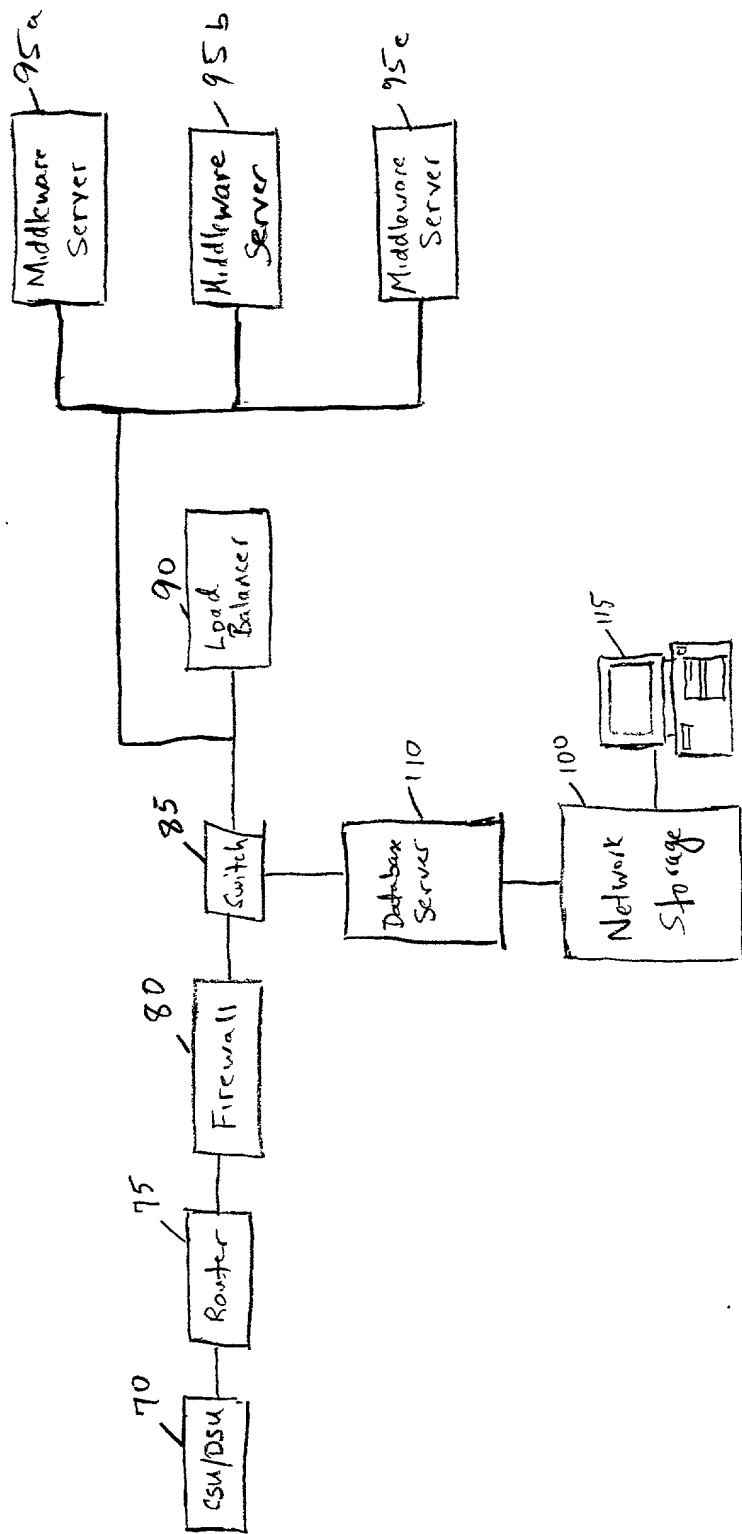


Fig. 3

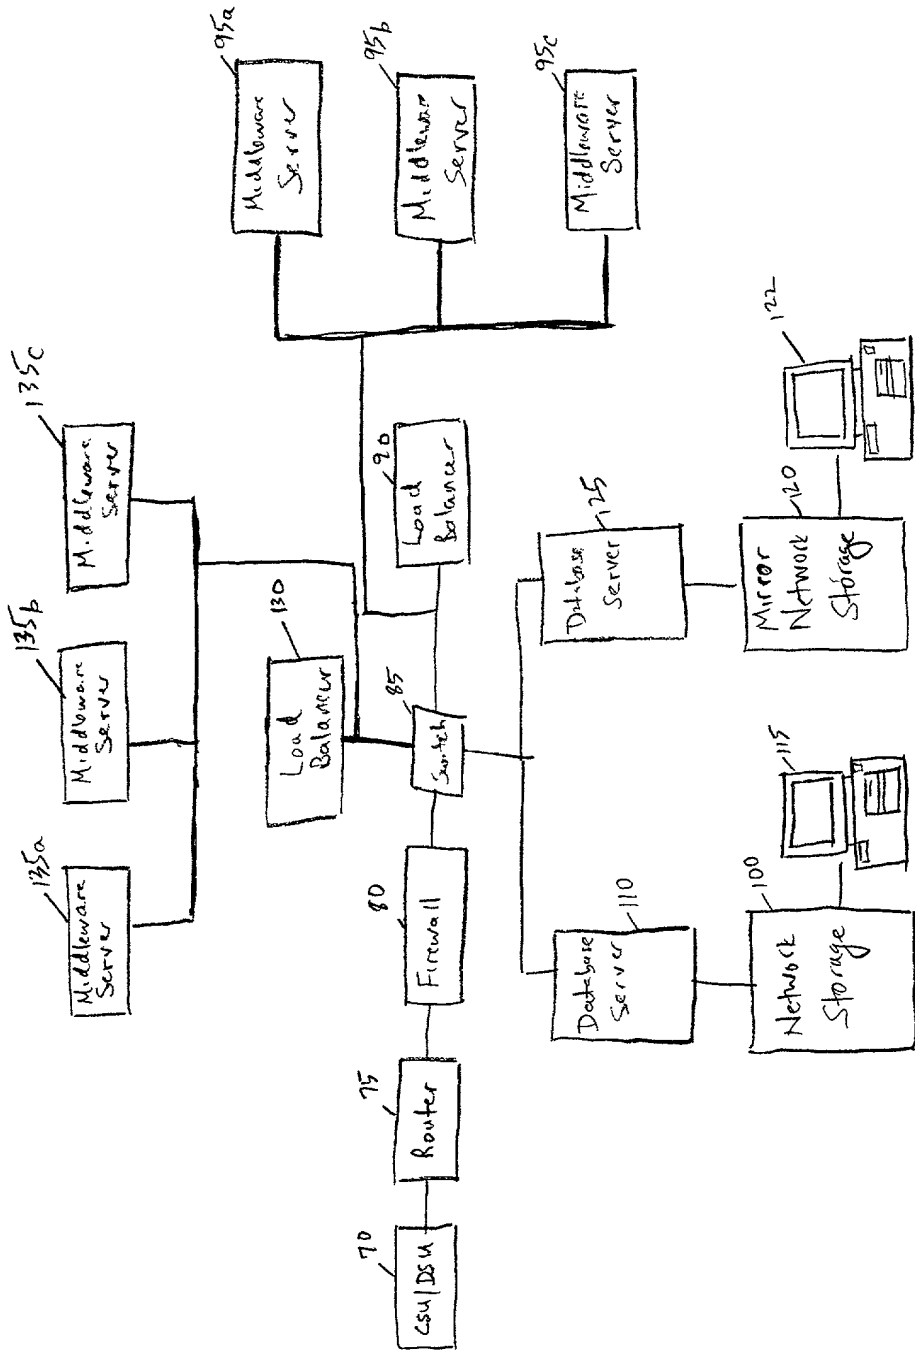


Fig 4

150

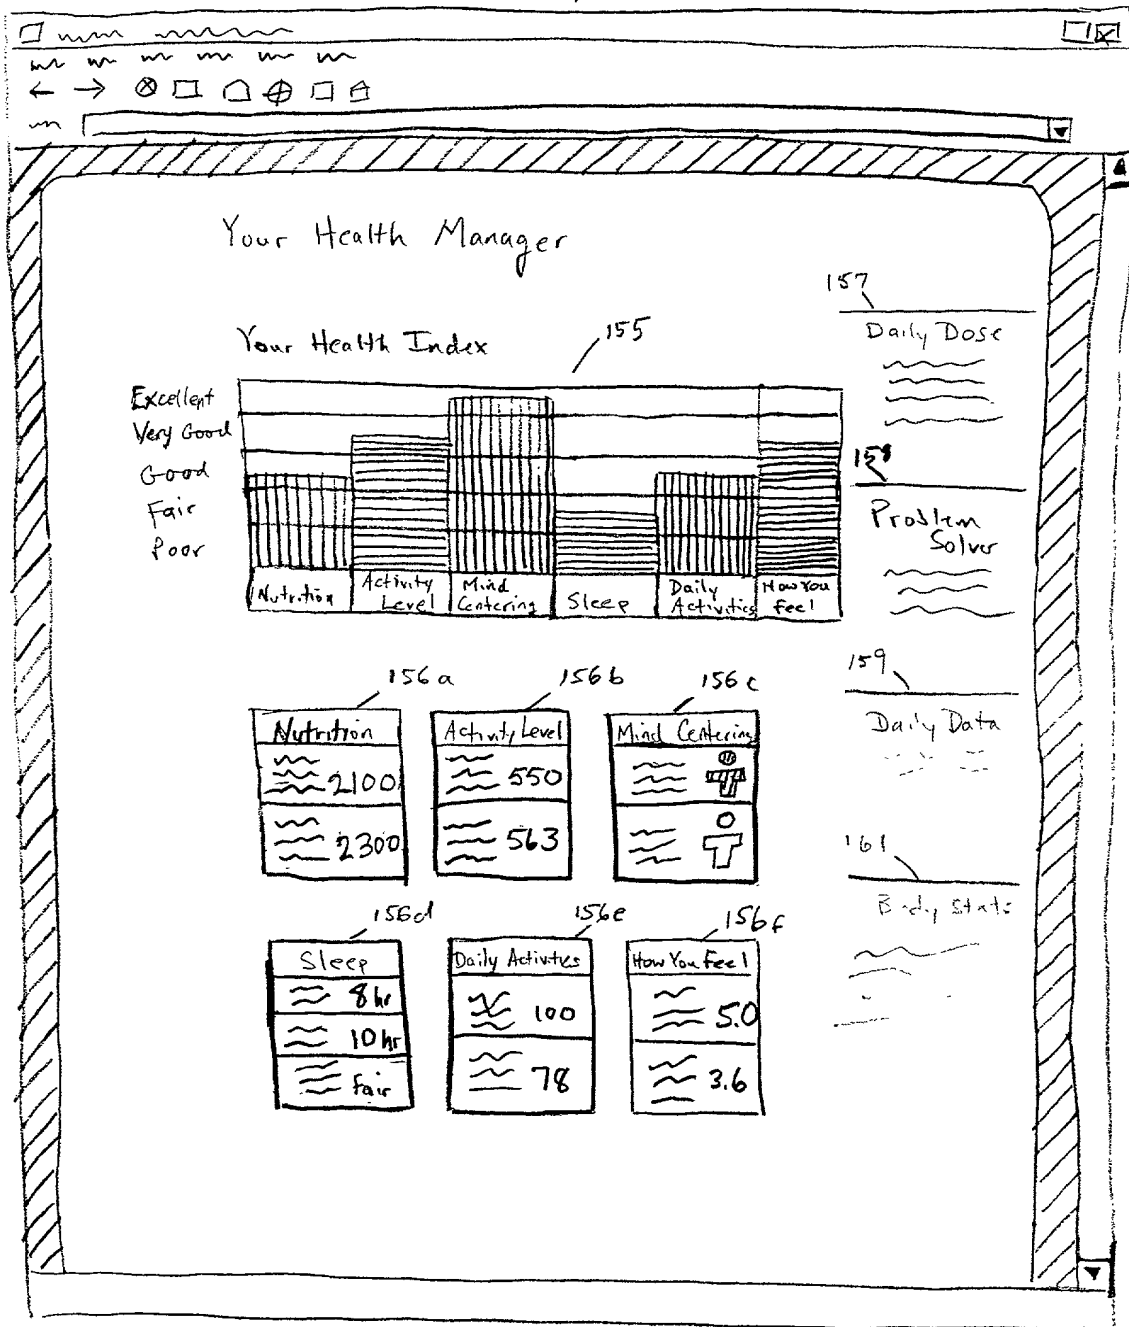


Fig. 5

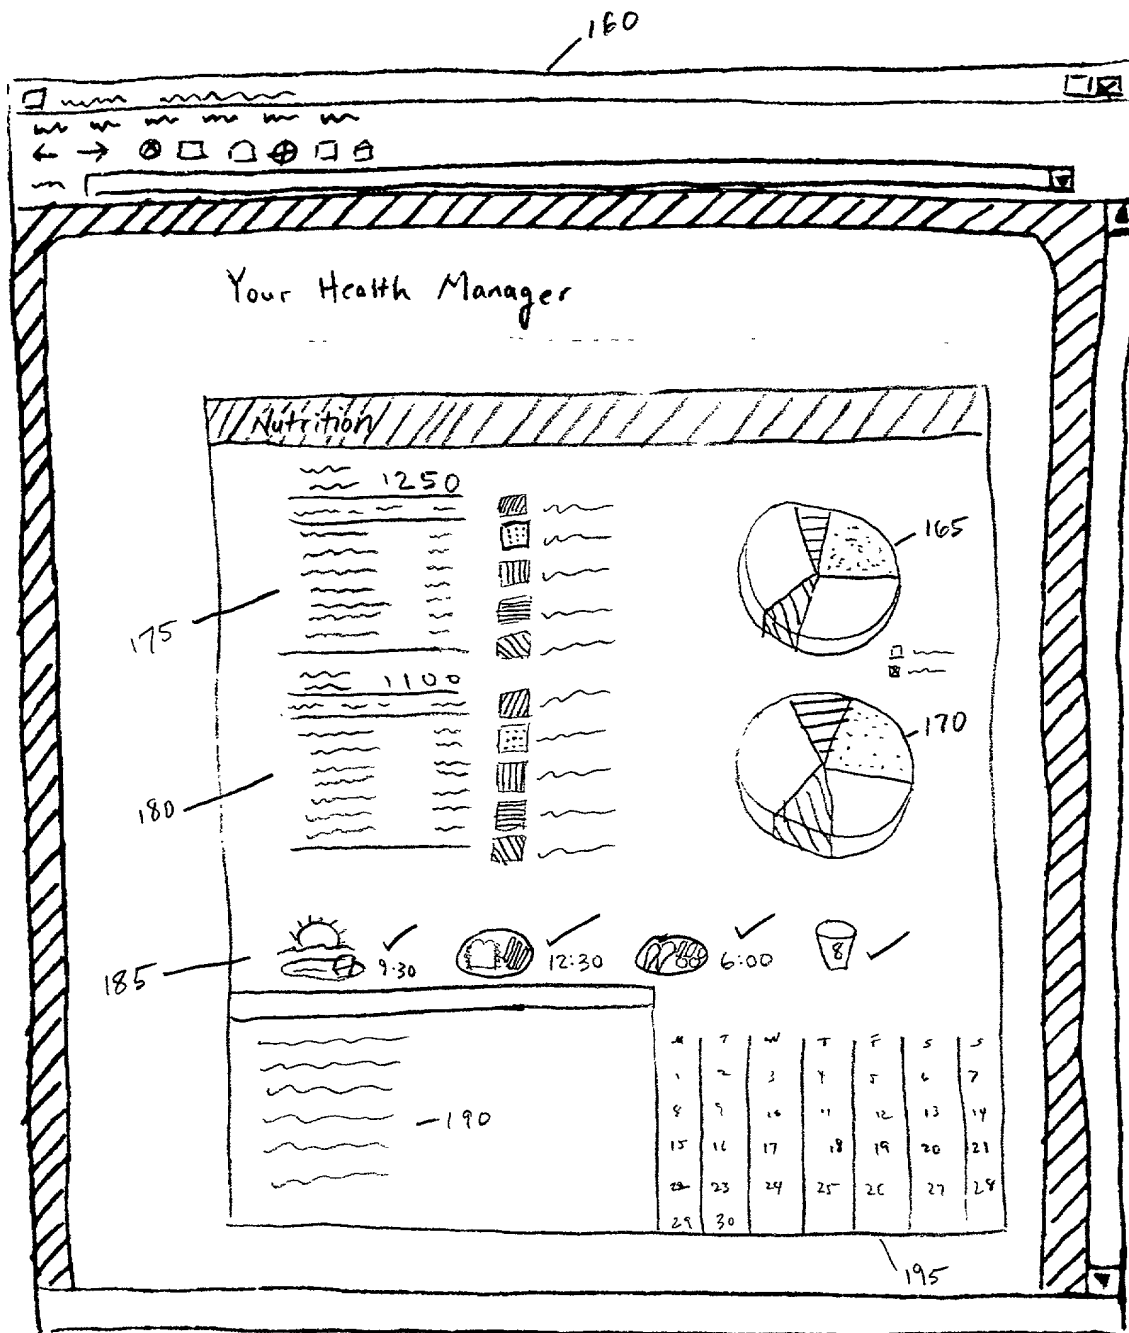


Fig 6

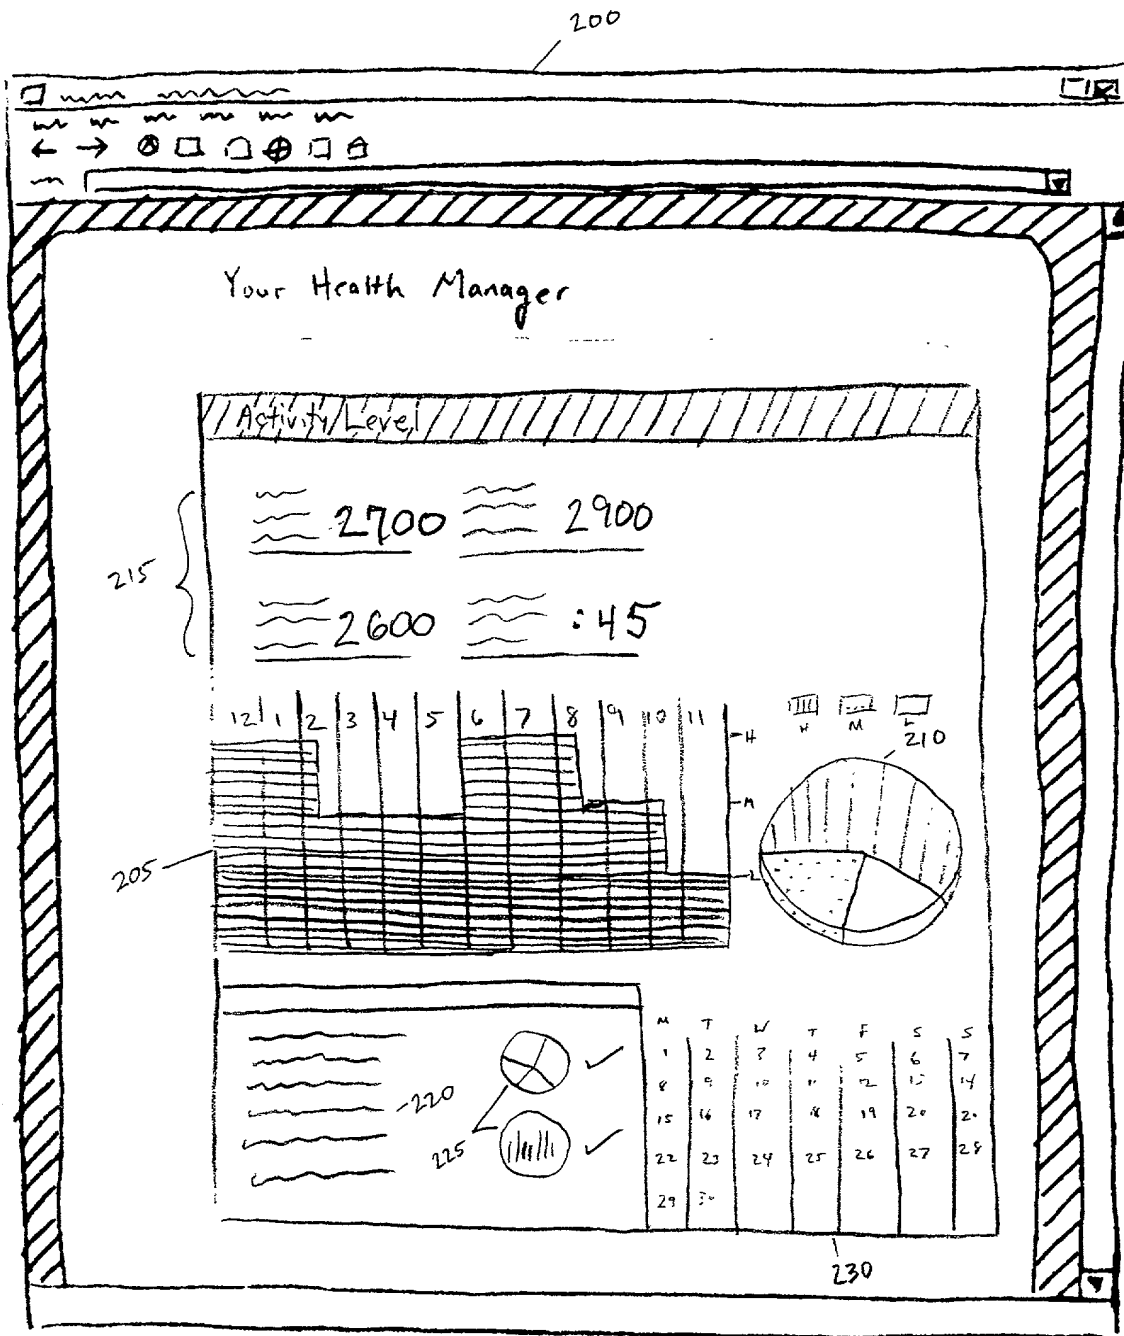


Fig. 7

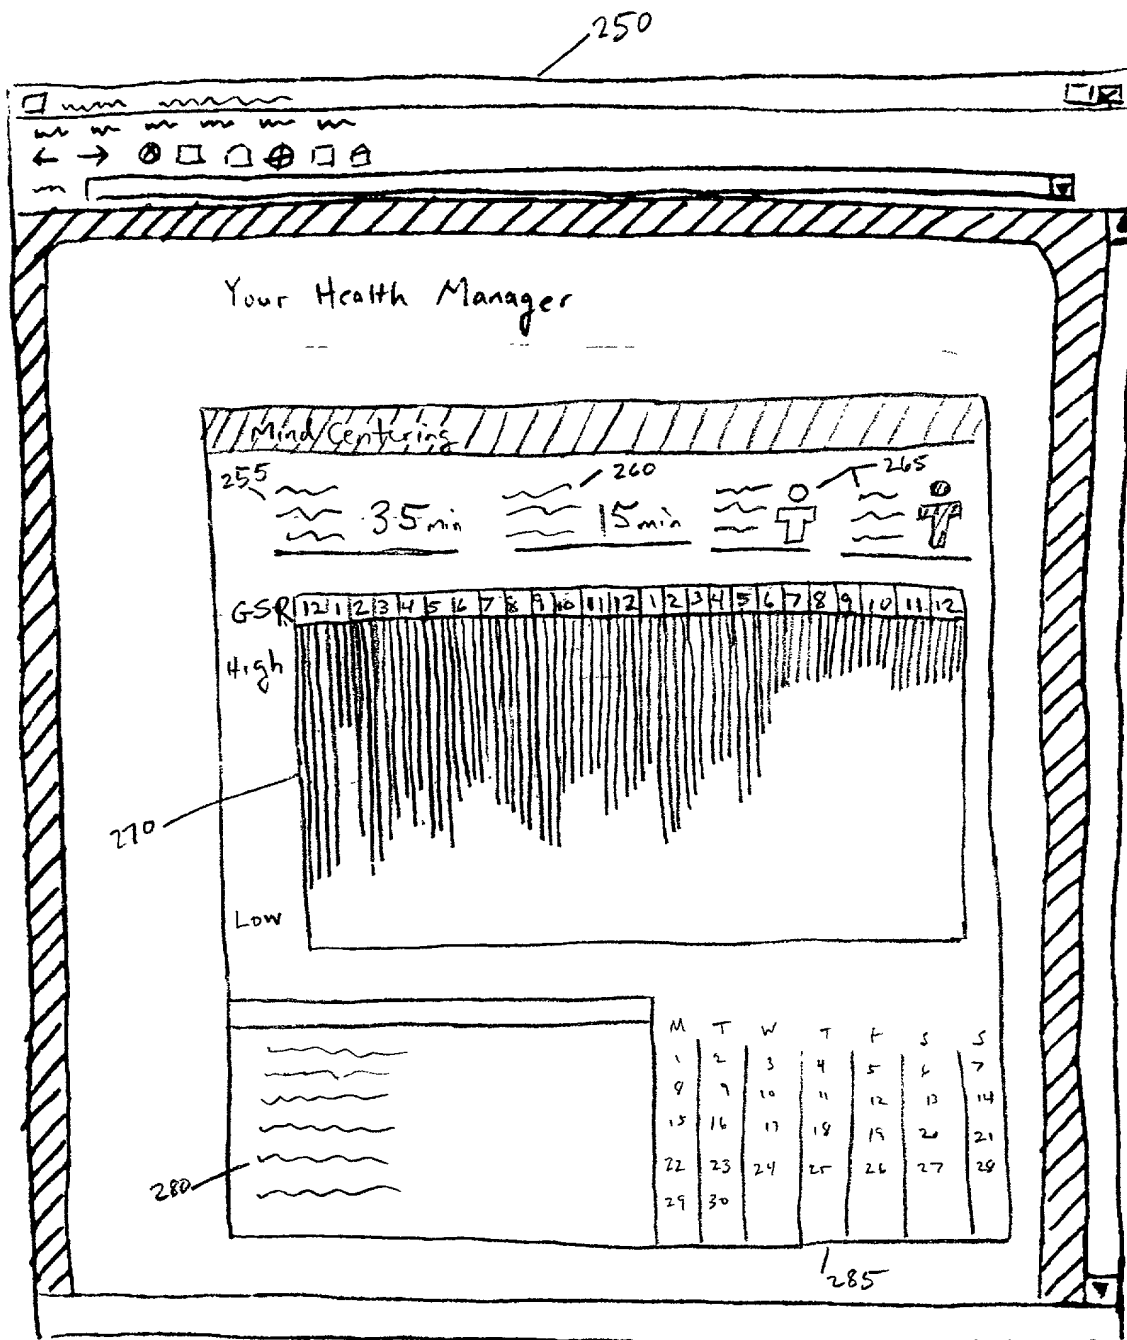


Fig 8

290

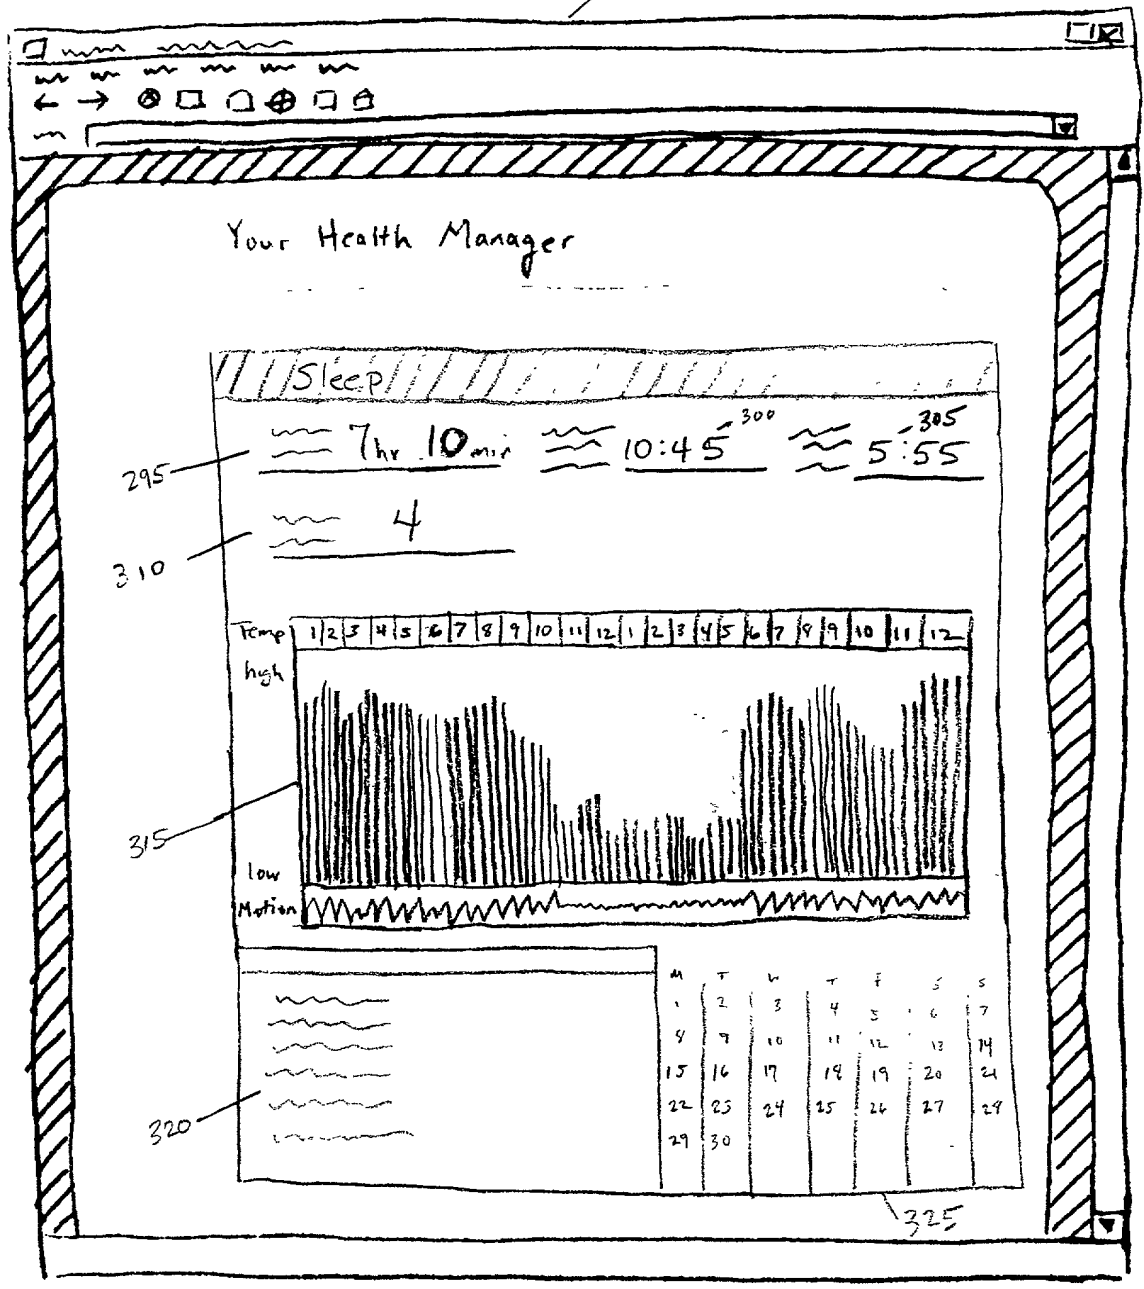


Fig 9

330

☐
☐

←
→
⊙
⊠
⊡
⊢

Your Health Manager

Daily Activities

	7	8	9	10	11	12	13
Personal Hygiene							
Bathe							
Brush Teeth/Floss							
Good Bowels							

335

Personal Time							
Quality Time							
Work time							
Leisure time							
Mind Stimulating							

340

M	T	W	T	F	S	S
1	2	3	4	5	6	7
8	9	10	11	12	13	14
15	16	17	18	19	20	21
22	23	24	25	26	27	28
29	30					

345

Fig. 10

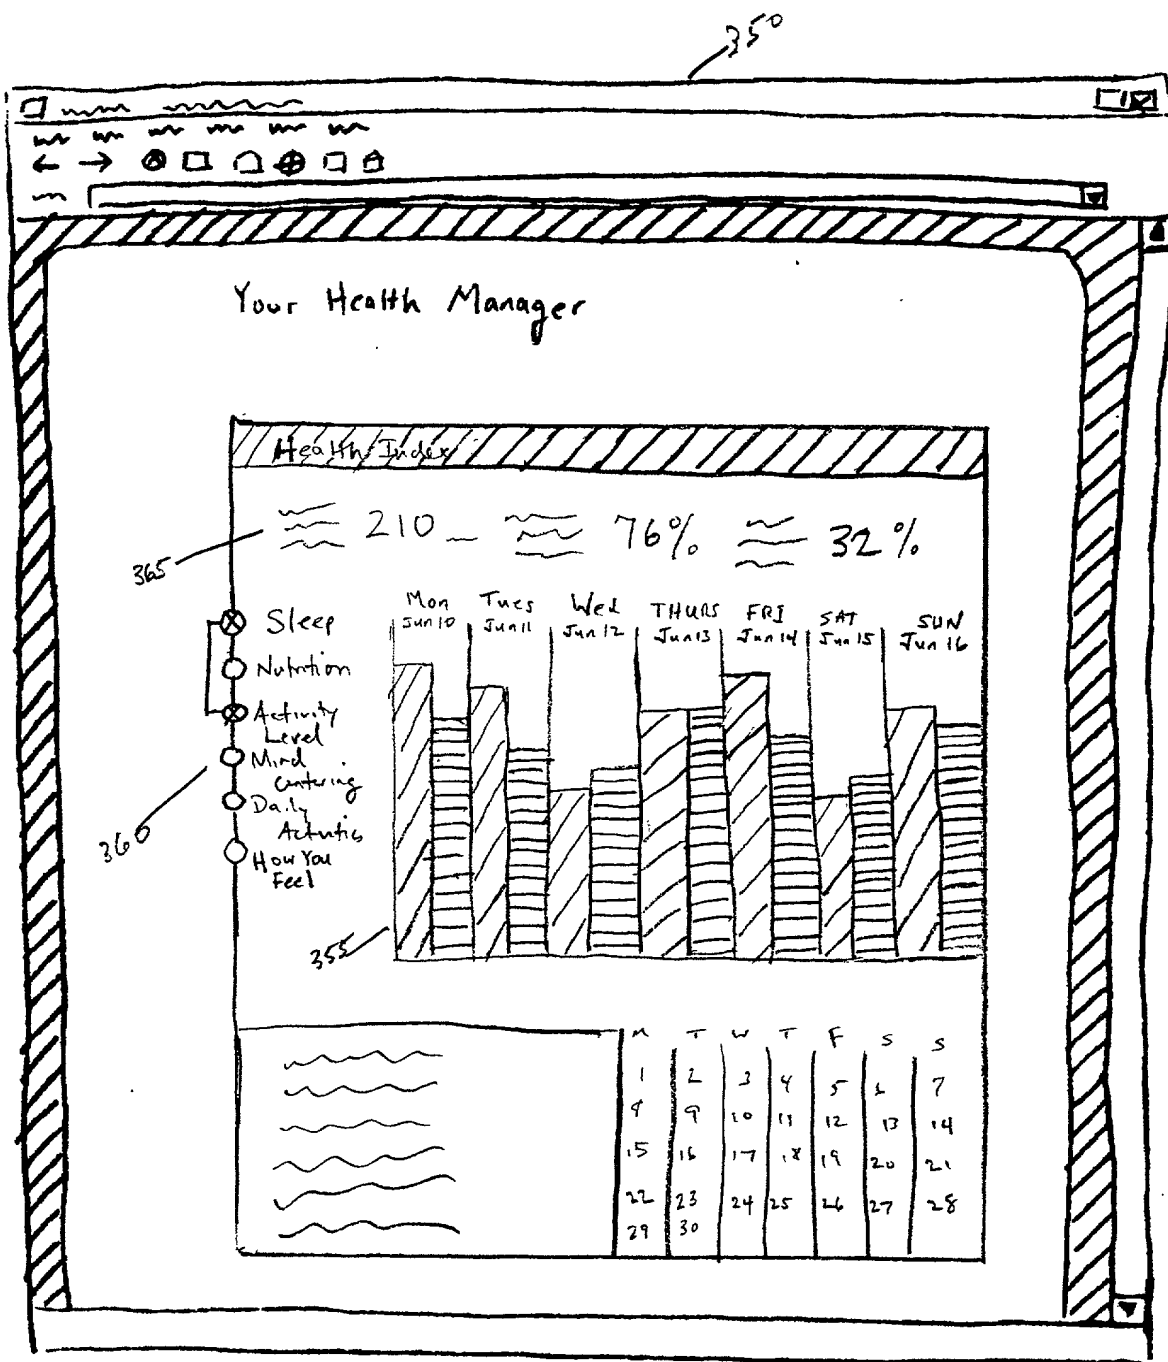


Fig. 11


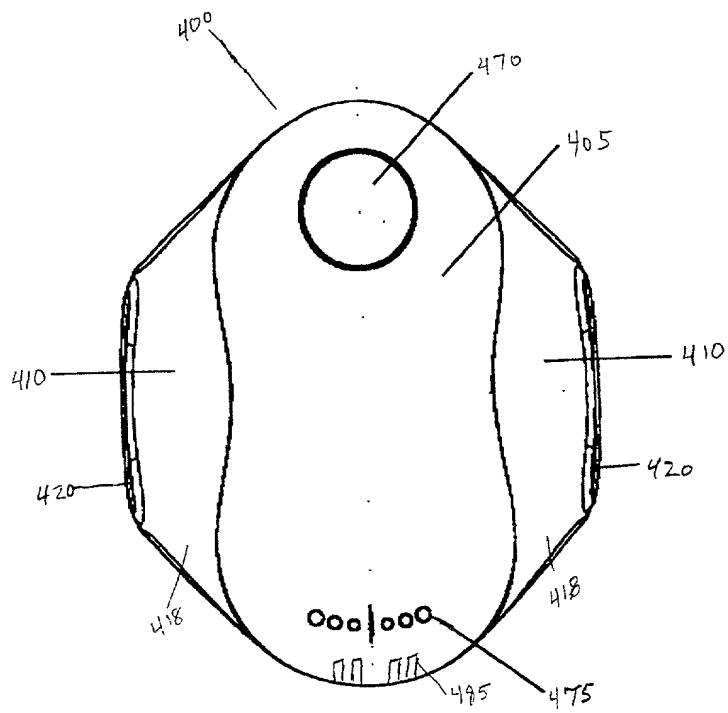


Fig. 12

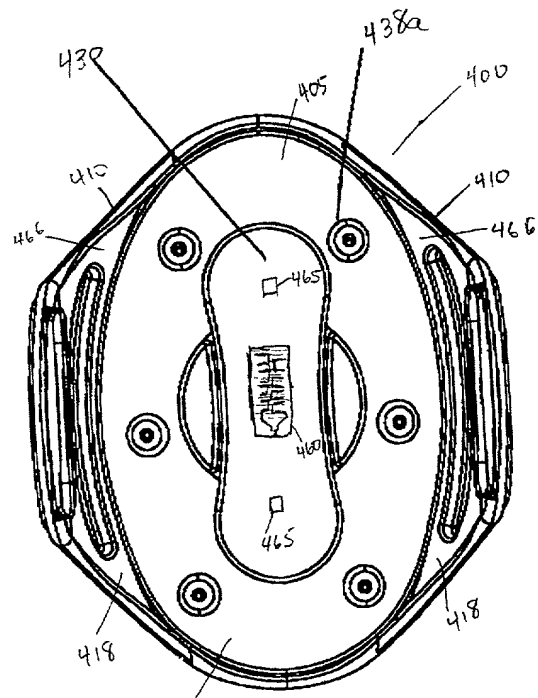

440, Fig. 13

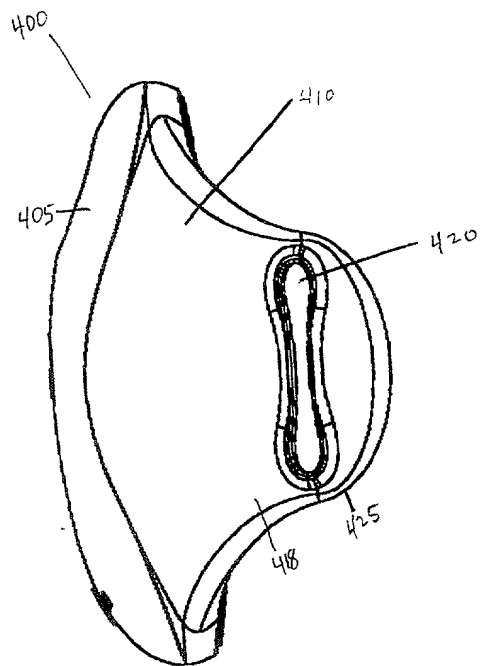


Fig. 14

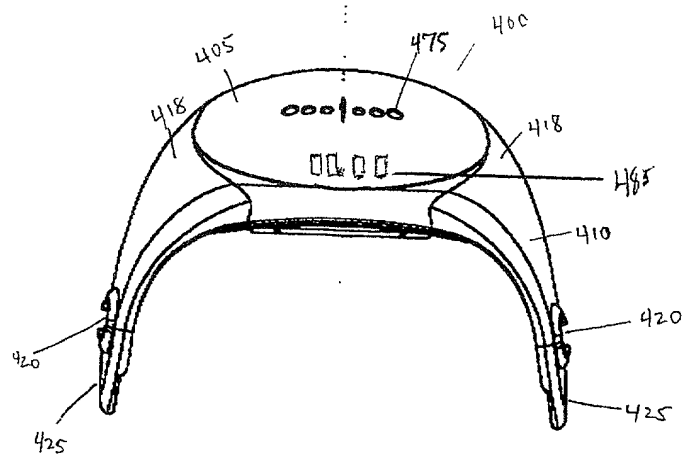


Fig. 15

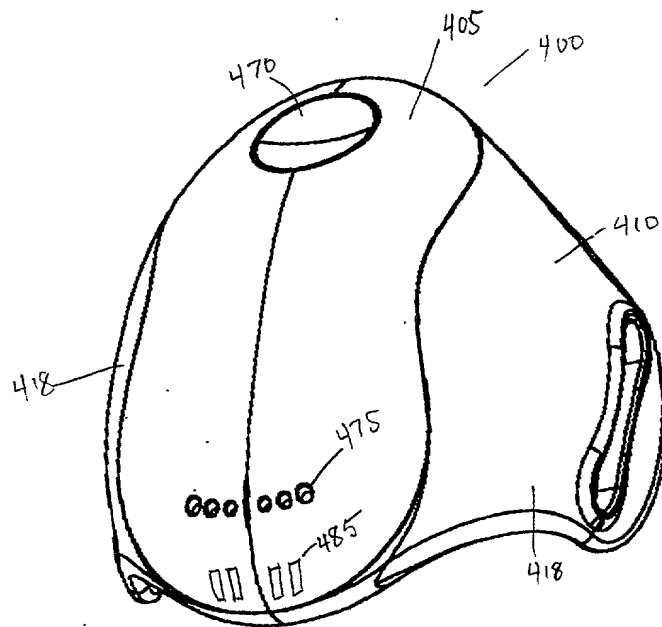


Fig. 16

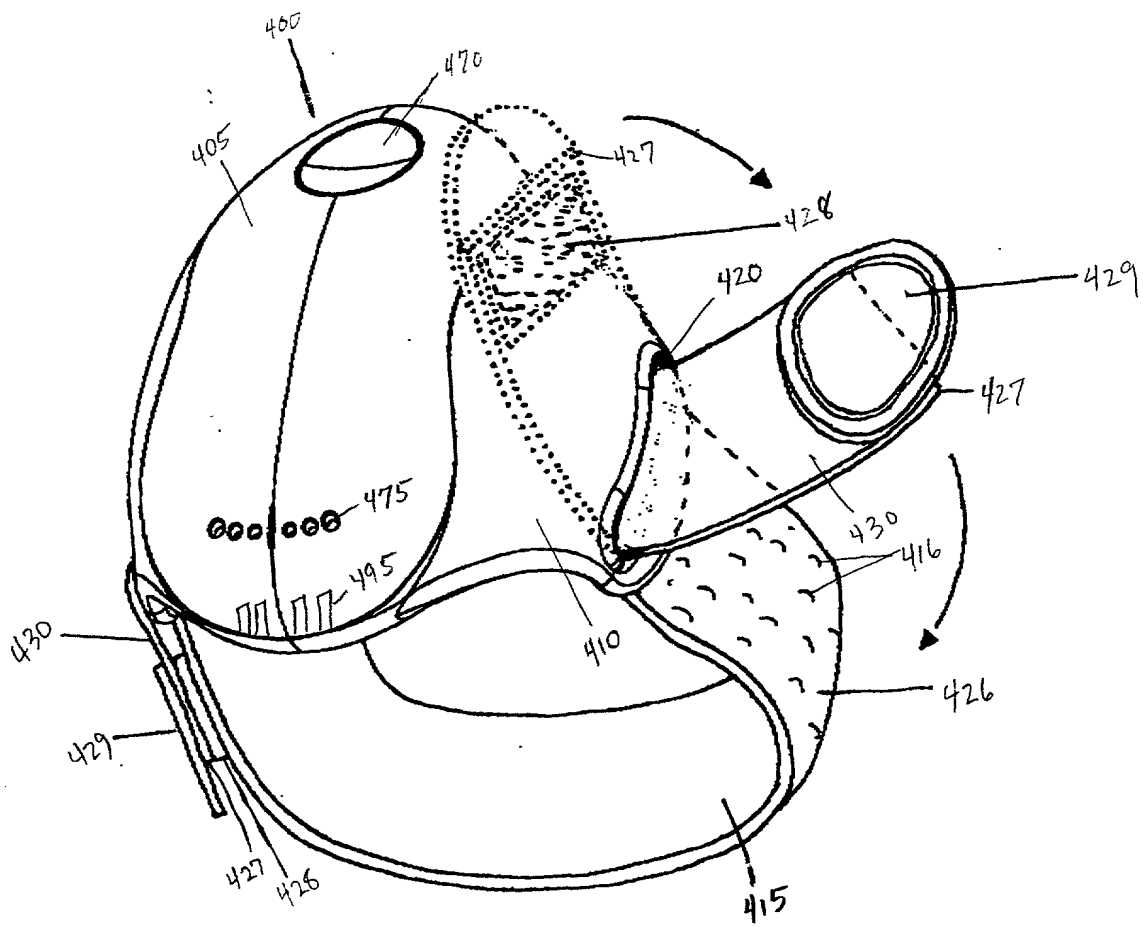


Fig. 17

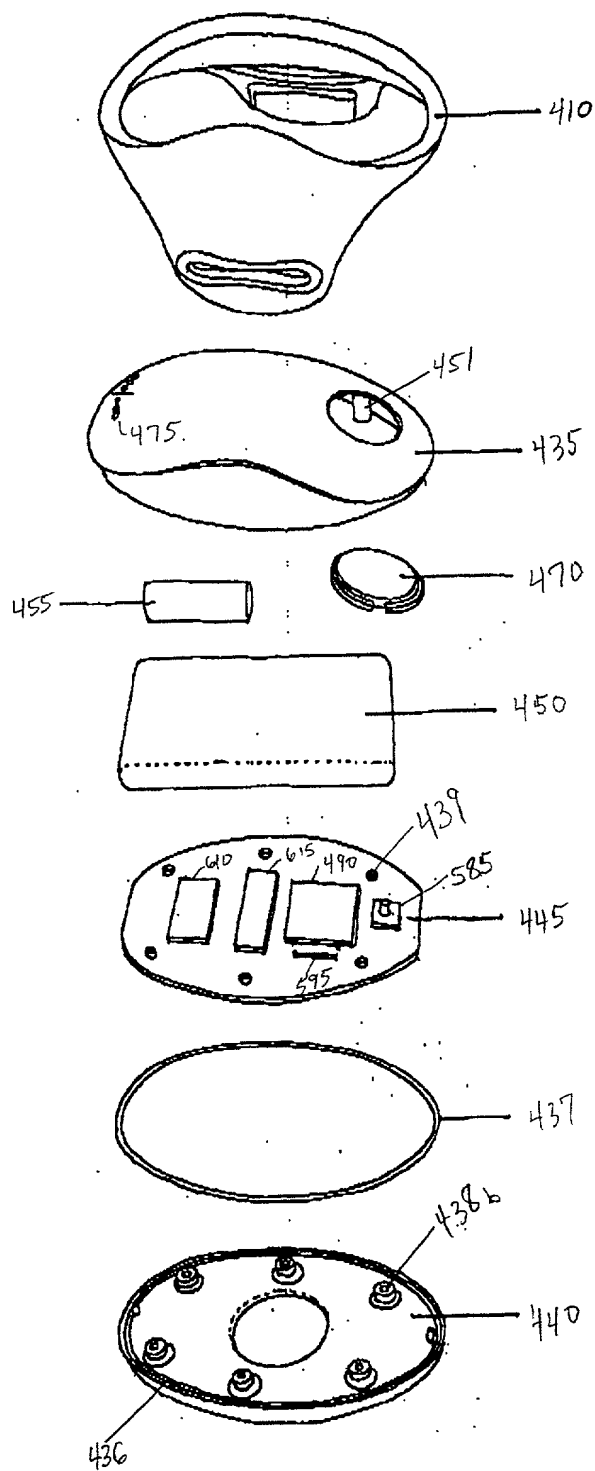


Fig. 18

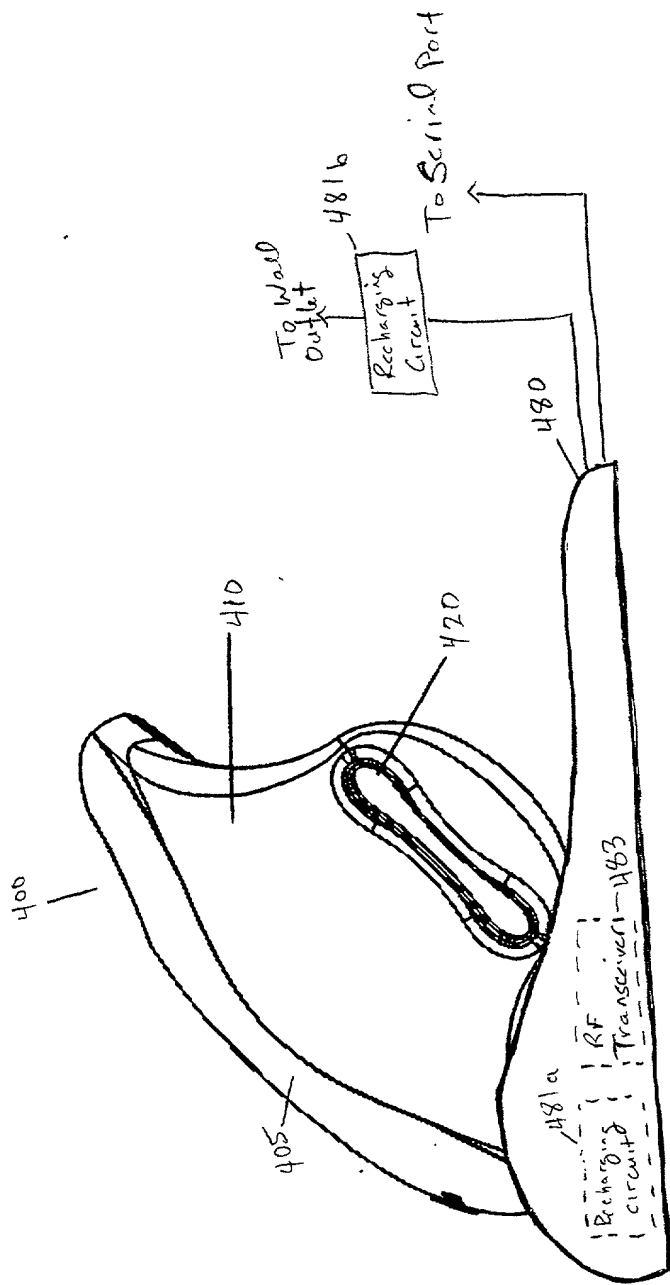


Fig. 19

490 495 500 505 510 515 520 525 530 535 540 545 550 555 560 565 570 575 580 585 590 595 600 605 610 615 620 625 630 635 640 645 650 655 660 665 670 675 680 685 690 695 700 705 710 715 720 725 730 735 740 745 750 755 760 765 770 775 780 785 790 795 800 805 810 815 820 825 830 835 840 845 850 855 860 865 870 875 880 885 890 895 900 905 910 915 920 925 930 935 940 945 950 955 960 965 970 975 980 985 990 995

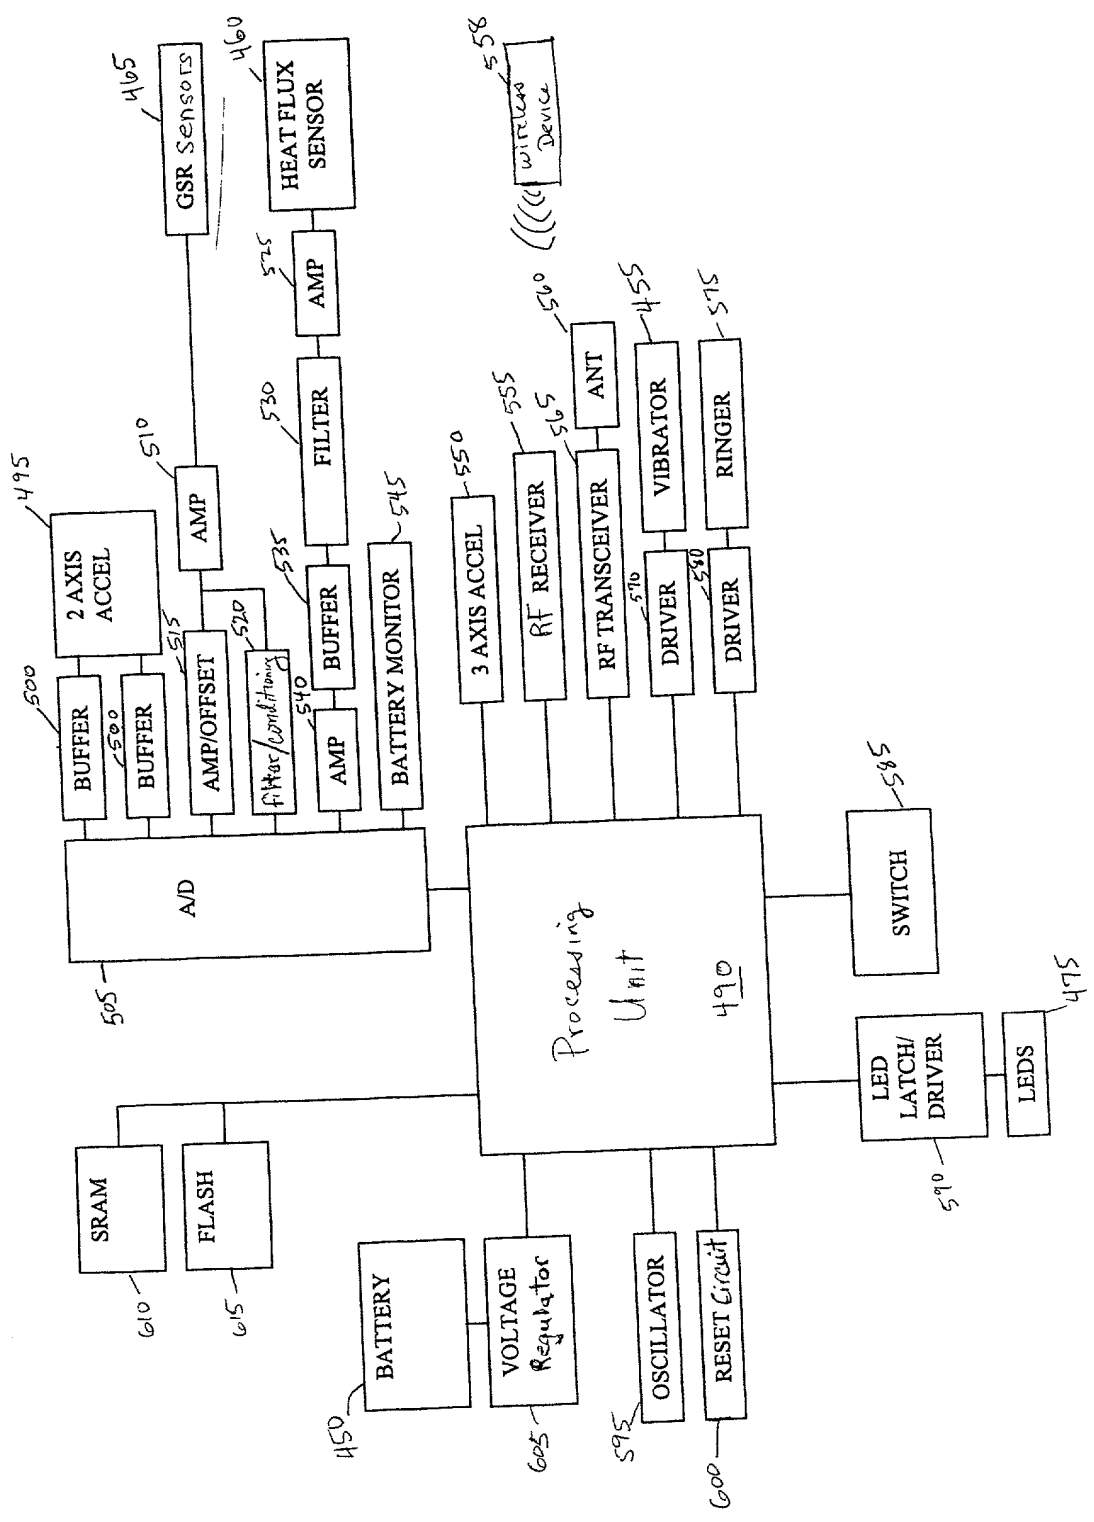


Fig. 20

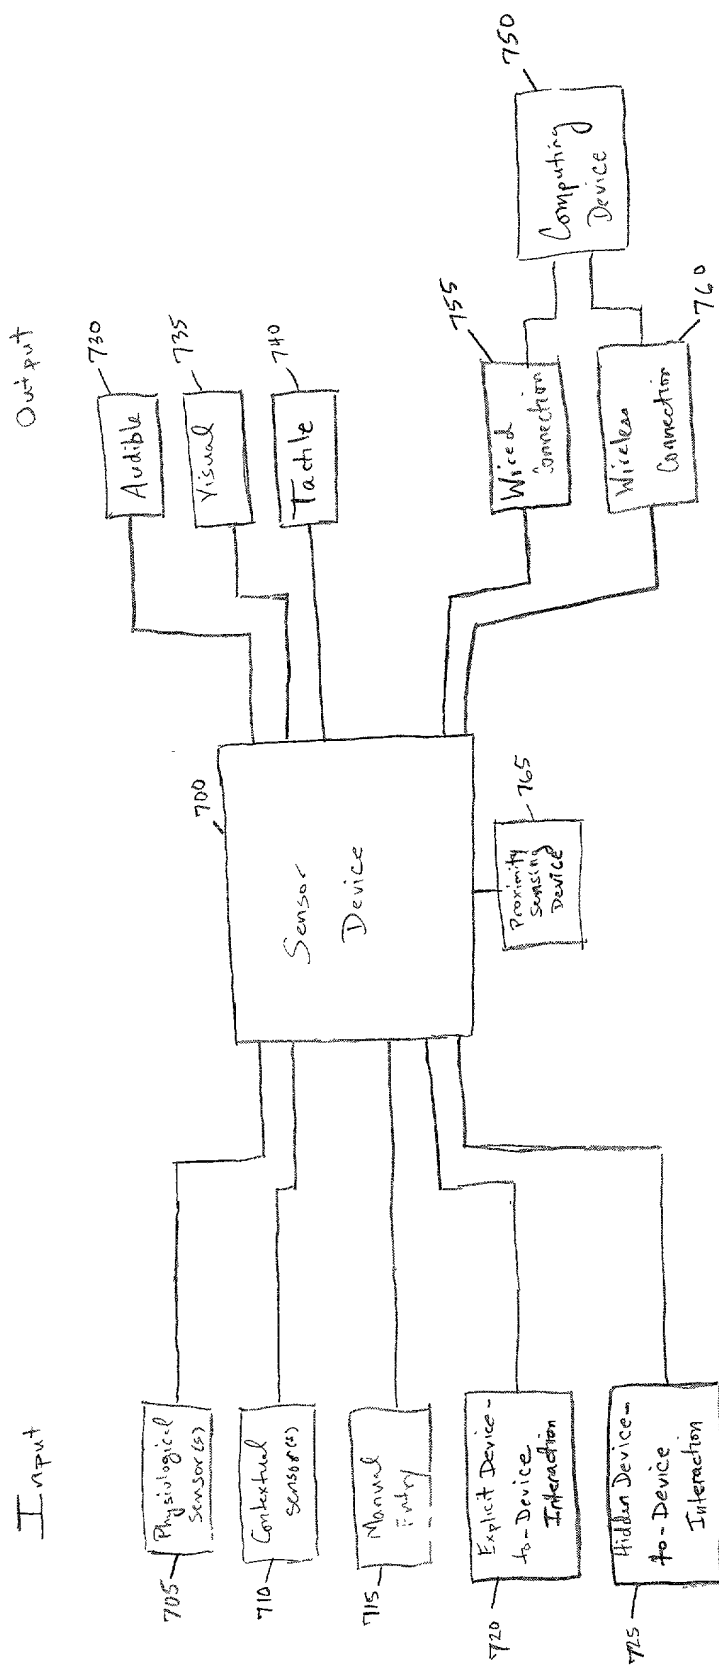


Fig 21